




**FR4518034101-105990**

**105990**

**Industrial-Maid**  
351 S. 12th Rd.  
Cortland, Nebraska 68331

**TF: 1-877-624-3247**  
**Fax: 402-798-7117**  
**www.industrial-maid.com**

Industrial Maid’s filters are made from a premium blend of flame retardant cellulose and polyester media. This material is especially designed for back pulse operations, and offers enhanced stability and structural integrity. All cellulose blend filters are dimpled pleated. This pleat lock helps maintain pleat spacing during operation.

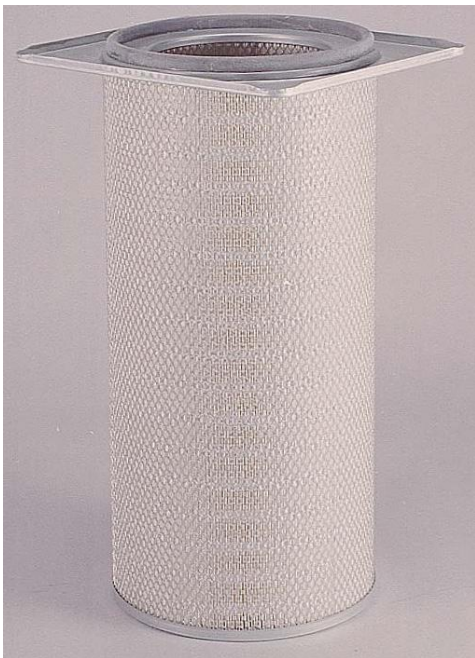

Height:	34"
Outside Diameter:	12.74"
Inside Diameter:	8.38"
Flange Dimension	16" x 14.25"
Gasket:	.625"Hght .5"Width
Pleat Depth:	2"
Pleat Count:	336
Media Sq. Ft.	296
Filter Media:	FR 80/20
Inner Cage:	72 % Open Expanded Metal
Outer Cage:	72 % Open Expanded Metal
Potting Material	Urethane
CFM Requirement:	600 CFM
Efficiency:	99.5% @ ½ Micron
Max. Operating Temp:	180°F



4518034101

