




**RV1915535103**

**Industrial-Maid**  
351 S. 12th Rd.  
Cortland, Nebraska 68331

**TF: 1-877-624-3247**  
**Fax: 402-798-7117**  
**www.industrial-maid.com**

**Replaces Robo-Vent 14D-36**

Industrial Maid’s filters are made from a premium blend of flame retardant and cellulose media. This material is especially designed for back pulse operations, and offers enhanced stability and structural integrity. All cellulose blend filters are dimpled pleated. This pleat lock helps maintain pleat spacing during operation.

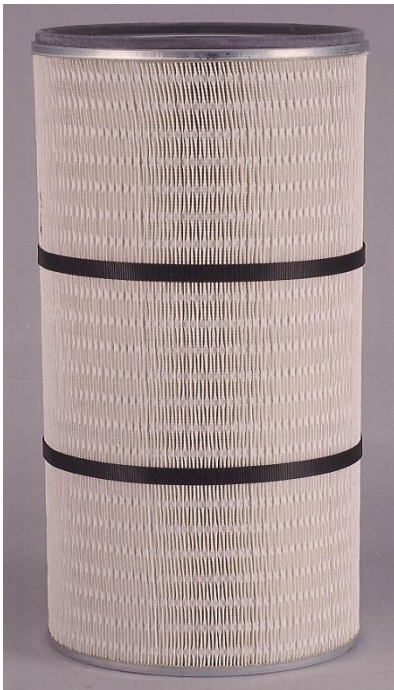

Height:	35"
Outside Diameter:	13.9"
Inside Diameter:	9.5"
Gasket:	1/2 X 5/8 D-Gasket
Pleat Depth:	2"
Pleat Count:	350
Media Sq. Ft.	340 Sq Ft.
Filter Media:	FR Cell/Poly Blend
Inner Cage:	Galvanized Expanded Metal
Outer Support	2 Bands
Potting Material	Urethane
End Cap Depth	.5"
Flow Capacity	600 CFM
Efficiency:	99.9 @ .5 micron
Max. Operating Temp:	180° F

