




CARTRIDGE DATA SHEET

RV4618026235

INDUSTRIAL MAID

Replaces RoboVent# CF-14D26-15-SF

Complete Filtration's filters are made from a premium blend of flame retardant cellulose and polyester media with a Nanofiber layer. This material is especially designed for back pulse operations, and offers enhanced stability and structural integrity. All cellulose blend filters are dimpled pleated. This pleat lock helps maintain pleat spacing during operation.

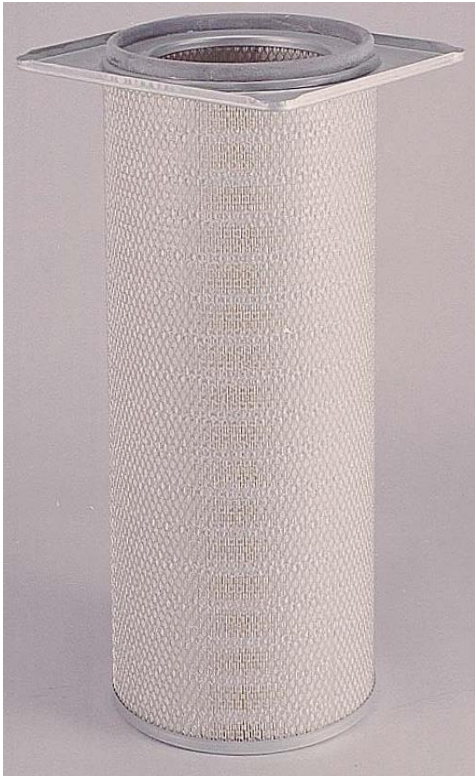

Height:	26"
Outside Diameter:	13.86"
Inside Diameter:	9.48"
Flange Dimension	16" x 16" Sq. Flange
Gasket:	.625" High X .5" Wide
Pleat Depth:	2"
Pleat Count:	285
Media Sq. Ft.	205
Filter Media:	FR Nanofiber MERV 15
Inner Cage:	72 % Open Expanded Metal
Outer Cage:	2 Outer Support Bands
Potting Material	Urethane
CFM Requirement:	600 CFM
Efficiency:	99.5% @ ½ Micron
Max. Operating Temp:	180°F

4618026235

